


Marine Winch

- Hot-dipped Galvanized For Superior Corrosion Protection
- Extra Heavy-Duty Construction In Winch Frame and Spool Brackets
- Grease Fittings At All Wear and Stress Points To Insure Smooth Operation
- Spring loaded Holding Dog For A Secure Lock
- Adjustable Handle For Easy Operation
- Positive Retention Cable Holding Mechanism
- Two Speed Operation
- To Be Used As Anchoring Devices Not Designed For Live Loads

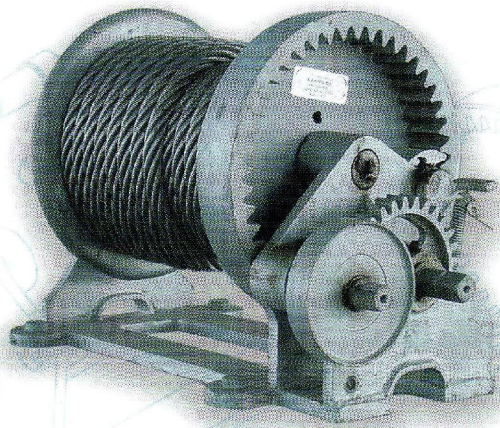

8 MARINE WINCH

DIMENSIONS
 Inside Drum Width: 6"
 Mounting Holes: 5 1/4" x 4 1/2"
 to center of holes
 Bolt Diameter 7/16"

WEIGHT: 35 LBS
HOLDING CAPACITY: 3000 LBS
LIFTING CAPACITY: 1500 LBS

CABLE CAPACITY
 1/4" Cable: 150 feet
 5/16" Cable: 105 feet
 3/8" Cable: (Max. Steel) 65 feet

GEAR RATIO: Large Gear: 3 to 1
 Small Gear: 8 to 1



11 MARINE WINCH

DIMENSIONS
 Inside Drum Width: 8 3/4"
 Mounting Holes: 11 1/4" x 8 1/2"
 to center of holes
 Bolt Diameter 1/2"

WEIGHT: 85 LBS
HOLDING CAPACITY: 10,000 LBS
LIFTING CAPACITY: 3000 LBS

CABLE CAPACITY
 3/8" Cable: 260 feet
 1/2" Cable: 185 feet
 5/8" Cable: 120 feet
 3/4" Cable: (Max. Steel) 75 feet

GEAR RATIO: Large Gear: 4 to 1
 Small Gear: 11 to 1
 Hand Brake Available



23 MARINE WINCH

DIMENSIONS
 Inside Drum Width: 21"
 Mounting Holes: 23 3/4" x 8 1/2"
 to center of holes
 Bolt Diameter 1/2"

WEIGHT: 130 LBS
HOLDING CAPACITY: 10,000 LBS
LIFTING CAPACITY: 3000 LBS

CABLE CAPACITY
 3/8" Cable: 560 feet
 1/2" Cable: 320 feet
 5/8" Cable: 280 feet
 3/4" Cable: (Max. Steel) 245 feet

GEAR RATIO: Large Gear: 4 to 1
 Small Gear: 11 to 1
 Hand Brake Available

